

mom

Please type a plus sign (+) inside this box → ☒PTO/SB/05 (1/98)  
Approved for use through 09/30/00. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

X-607 US

First Named Inventor or Appl. Identifier

David B. Parlour

Title

Intellectual Property Protection in a Programmable Logic Device

Express Mail Label No.

EL539649563US

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- 1.
- ☒
- Fee Transmittal Form (e.g., PTO/SB/17)
- 
- (Submit an original, and a duplicate for fee processing)

- 6.
- ☐
- Microfiche Computer Program (Appendix)

- 2.
- ☒
- Specification [Total Pages
- 36**
- ]
- 
- (preferred arrangement set forth below)
- 
- Descriptive title of the Invention
- 
- Cross References to Related Applications
- 
- Statement Regarding Fed sponsored R & D
- 
- Reference to Microfiche Appendix
- 
- Background of the Invention
- 
- Brief Summary of the Invention
- 
- Brief Description of the Drawings (if filed)
- 
- Detailed Description
- 
- Claim(s)

- 7.
- ☐
- Nucleotide and/or Amino Acid Sequence Submission
- 
- (if applicable, all necessary)

- 3.
- ☒
- Drawing(s) (35 USC 113) [Total Sheets
- 5**
- ]

- a.
- ☐
- Computer Readable Copy

4. Oath or Declaration [Total Pages
- ☐

- b.
- ☐
- Paper Copy (identical to computer copy)

- a.
- ☒
- Newly executed (original or copy)

- c.
- ☐
- Statement verifying identity of above copies

- b.
- ☐
- Copy from a prior application (37 CFR 1.63(d))
- 
- (for continuation/divisional with Box 17 completed)

- i.
- ☐
- [Note Box 5 below]
- 
- DELETION OF INVENTOR(S)**
- 
- Signed statement attached deleting
- 
- inventor(s) named in the prior application,
- 
- see 37 CFR 1.63(d)(2) and 1.33(b).

- 5.
- ☐
- Incorporation By Reference (useable if Box 4b is checked)
- 
- The entire disclosure of the prior application, from which a
- 
- copy of the oath or declaration is supplied under Box 4b,
- 
- is considered as being part of the disclosure of the
- 
- accompanying application and is hereby incorporated by
- 
- reference therein.

**ACCOMPANYING APPLICATION PARTS**

- 8.
- ☒
- Assignment Papers (cover sheet & document(s))
- 
- 9.
- ☐
- 37 CFR 3.73(b) Statement (when there is an assignee)
- ☐
- Power of Attorney
- 
- 10.
- ☐
- English Translation Document (if applicable)
- 
- 11.
- ☒
- Information Disclosure Statement (IDS)/PTO-1449
- ☒
- Copies of IDS Citations
- 
- 12.
- ☐
- Preliminary Amendment
- 
- 13.
- ☒
- Return Receipt Postcard (MPEP 503)
- 
- (Should be specifically itemized)
- 
- 14.
- ☐
- \*Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
- 
- 15.
- ☐
- Certified Copy of Priority Document(s) (if foreign priority is claimed)
- 
- 16.
- ☐
- Other: .....

\* A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon.

17. If a
- CONTINUING APPLICATION**
- , check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_**18. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label or ☒ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

Name	Edel M. Young				
	XILINX, INC.				
Address	2100 Logic Drive				
City	San Jose	State	California	Zip Code	95124
Country	US	Telephone	408-879-4969	Fax	408-377-6137

Name (print/Type)	Edel M. Young	Registration No. (Attorney/Agent)	32,451
Signature	<i>Edel M. Young</i>	Date	March 14, 2000

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

INTELLECTUAL PROPERTY PROTECTION  
IN A PROGRAMMABLE LOGIC DEVICE

David B. Parlour  
Richard S. Ballantyne

TECHNICAL FIELD

This invention relates to a method and apparatus for securing configuration data used to configure a programmable logic device.

BACKGROUND INFORMATION

The term Programmable Logic Device (PLD) designates a class of devices that are programmable by end users to realize user-specific circuits. Examples of PLDs are FPGAs (Field Programmable Gate Arrays) and EPLDs (Erasable Programmable Logic Devices). To use a PLD, a user captures a circuit design using any of several capture/design tools. The user then uses the capture/design tool to convert the captured design into device-specific configuration data. The configuration data is commonly stored in an external storage device, such as an EPROM. Upon startup, the storage device supplies the configuration data to the PLD, thereby configuring the PLD to realize the user-specific circuit. Since the configuration data is often supplied in serial fashion, the configuration data is called a "bitstream". The PLD, having read in the configuration data bitstream, is then configured to realize the user-specific circuit.

Figure 1 (Prior Art) illustrates the loading of such a configuration data bitstream 1 from an external storage device 2 into a PLD 3 to realize a user-specific circuit.

1 PLD 3 in this case is an FPGA (for example, a XC4000 series  
2 FPGA available from Xilinx, Inc. of San Jose, California).  
3 PLD 3 includes a plurality of configurable logic blocks  
4 (called CLBs) 4, and a programmable interconnect structure  
5 5, surrounded by a ring of configurable input/output blocks  
6 (called IOBs) 6. Each of the CLBs, the programmable  
7 interconnect structure, and the IOBs includes configuration  
8 memory cells, the contents of which determine how the CLBs,  
9 the programmable interconnect structure, and the IOBs are  
10 configured. Particular bits in bitstream 1 correspond to  
11 the contents of particular configuration memory cells. If,  
12 for example, two pieces of interconnect in the programmable  
13 interconnect structure controlled by a particular memory  
14 cell are to be connected in the user-specific circuit, then  
15 the particular bit in the bitstream corresponding to the  
16 memory cell for the particular programmable connection is  
17 set accordingly. Upon power-up of the FPGA, the bitstream  
18 1 is transferred from external storage device 2 into PLD 3  
19 to configure PLD 3 to be the user-specific circuit. In  
20 some prior art FPGA architectures, the protocol of the  
21 configuration data bitstream (including knowledge of which  
22 bits correspond to which configuration memory cells) is  
23 proprietary to the FPGA manufacturer, thereby providing  
24 individual users a level of security for their designs.  
25 Without knowledge of the protocol and the significance of  
26 the individual bits of the bitstream, another user cannot  
27 readily regenerate the actual circuit by inspection of the  
28 bitstream.

29 Over recent years, such user-specific circuits have  
30 typically increased in size and complexity. Simultaneously,  
31 market forces have reduced the amount of time practically  
32 available for developing such large user-specific circuits.

1 In this environment, users have increasingly found it cost-  
2 effective to purchase from IP vendors (intellectual  
3 property vendors) pre-designed building blocks for use in  
4 the users' designs. Such a building block, sometimes  
5 called an "IP module" (intellectual property module), may  
6 have taken the IP vendor several engineer-years to design.  
7 An example of such an IP module is a PCI bus interface  
8 module. Rather than taking the time to design a circuit to  
9 perform the PCI interface function carried out by the IP  
10 module, the user 7 purchases the IP module 8 (in digital  
11 form) from the IP vendor. User 7 loads the IP module 8  
12 into a capture/design tool 9 used to capture the user-  
13 specific design. User 7 then adds other user-specific  
14 circuitry 10 around the IP module using the capture/design  
15 tool 9, thereby designing the overall user-specific  
16 circuit. Once the overall user-specific circuit is  
17 designed, simulated, placed and routed, (steps in  
18 converting the user's design to device-specific  
19 configuration data) the capture/design tool 9 outputs the  
20 bitstream 1 for the overall user-specific circuit. As  
21 illustrated in Figure 1, this bitstream 1 is then loaded  
22 into the external storage device 2 (for example, a PROM) so  
23 that the external storage device 2 will be able to supply  
24 the bitstream 1 to the FPGA on power-up.

25 A problem, however, exists in that the user's user-  
26 specific design can be copied. An unscrupulous second user  
27 could obtain a product of a first user on the market and  
28 copy the bitstream 1 that passes from the external storage  
29 device 2 to FPGA 3 on power-up. The second user could then  
30 use the copied bitstream to configure another FPGA (the  
31 same type of FPGA used by the first user), thereby  
32 replicating the first user's user-specific design and

1 product. Protection against this copying of one user's  
2 design by another user is desired.

3 Erickson in U.S. Patent No. 5,970,142 [docket X-245]  
4 discloses one method wherein the bitstream transferred from  
5 the external storage device is in encrypted form and the  
6 PLD being configured has a key to decrypt the encrypted  
7 bitstream. The PLD receives the encrypted bitstream and  
8 uses its key to generate the unencrypted bitstream which is  
9 then loaded into the configuration memory cells to  
10 configure the PLD. Because in this method the key is not  
11 passed from the external storage device to the PLD, a  
12 copier would not have access to the key. Without the key,  
13 the copier would have a difficult time recovering the  
14 bitstream. Other methods are also known.

15 Not only is one user's copying of another user's  
16 design a problem, but the unauthorized reincorporation of a  
17 vendor-supplied IP module into other user designs is also a  
18 problem. Redman et al. in U.S. Patent No. 5,978,476, as  
19 the present inventors understand it, discloses a design  
20 processing system that attempts to verify the identity of  
21 the user before allowing the user to use a vendor-supplied  
22 IP module. The design processing system that generates a  
23 programming file of bitstream information contains the IP  
24 module in an encrypted form as well as a permission  
25 verification system. The vendor to the IP module supplies  
26 an authorization code to a particular user where the  
27 authorization code is specific to the computer of the user  
28 (or is specific to a "dongle" supplied to the user). When  
29 an attempt is later made to use an IP module in the design  
30 processing system, the permission verification system  
31 requires the user to supply the authorization code. The  
32 permission verification system reads the computer's

1 identification number (or the "dongle" number of a dongle  
2 attached to the computer) and checks this number with the  
3 supplied authorization code. If the number read from the  
4 computer is not appropriate for the authorization number  
5 provided by the user, then the user-verification process  
6 fails and the permission verification system does not allow  
7 the IP module to be decrypted. Aspects of the IP module  
8 are not revealed to the user. Moreover, the design  
9 processing system will not include configuration data for  
10 the IP module in the output programming file.

11 If, on the other hand, the number read from the  
12 computer is appropriate for the authorization code provided  
13 by the user, then the permission verification system allows  
14 the encrypted IP module to be decrypted and used by the  
15 design processing system. The user uses the design  
16 processing system to incorporate the IP module into the  
17 user-specific circuit designed by the user. When design of  
18 the user-specific circuit is completed, the design  
19 processing system outputs configuration data for the user-  
20 specific circuit in a programming file. The programming  
21 file of configuration data is then usable to program a PLD  
22 to realize the user-specific circuit. In this scheme,  
23 however, the configuration data so generated is output from  
24 the design processing system in unencrypted form. An  
25 authorized but nonetheless unscrupulous user could copy the  
26 programming file of bitstream information or a portion  
27 thereof and reuse it in an unauthorized fashion outside the  
28 control of the design processing system.

29 An improved system and method for protecting PLD  
30 designs is desired wherein a user is prevented from using  
31 an IP module in an unauthorized manner, and wherein one

1 user is prevented from copying the user-specific circuit of  
2 another user.

3  
4 SUMMARY

5 A user arranges with an IP vendor to use a particular  
6 IP module. If the arrangement is suitable to the IP  
7 vendor, then the IP vendor issues the user an authorization  
8 code. This authorization code contains: 1) a usage  
9 condition, 2) an indication of the IP module authorized, 3)  
10 an "IP module key" for the IP module, and 4) a value (for  
11 example, a serial number or ID number or dongle number)  
12 that identifies the user's development system. There are  
13 numerous different usage conditions. Possible usage  
14 conditions include: usage is authorized for an unlimited  
15 number of uses, usage is authorized for an unlimited number  
16 of uses during a particular time period, usage is  
17 authorized for a limited number of uses, usage is  
18 authorized only for a particular development system (node-  
19 locked license), usage is authorized on a particular  
20 individual PLD.

21 In an embodiment where authorization is granted for  
22 use on a particular PLD, the authorization code also  
23 contains the unique device identifier (UDI) of the target  
24 PLD to be programmed. For some types of PLD, each PLD is  
25 manufactured with its own unique, non-volatile, non-  
26 rewritable UDI that uniquely identifies that particular  
27 PLD. The user uses the development system to read the UDI  
28 out of the target PLD. The user then supplies the UDI to  
29 the IP vendor. The IP vendor uses authorization code  
30 generating software to generate an authorization code that  
31 includes that UDI. The authorization code is therefore, in  
32 this embodiment, specific to the particular target PLD.

1       A public key/private key encryption scheme is used to  
2 encrypt the authorization code such that the user cannot  
3 decipher the information contained within it. The IP  
4 vendor's authorization code generating software uses the  
5 UDI (as a public key) as well as another key (a private  
6 key) to encrypt the authorization code. The private key is  
7 known both to the IP vendor's authorization code generating  
8 software as well as to the user's development system, but  
9 the private key (unlike the UDI) is not communicated to the  
10 authorization code generating software. The private key is  
11 not known to the user. The user and the IP vendor  
12 therefore have no access to the private key.

13       After receiving the authorization code, a part of the  
14 development system called the license manager "verifies"  
15 that the user is authorized to use the particular IP  
16 module. If, for example, the usage condition indicated by  
17 the authorization code indicates use is authorized during a  
18 certain time period, then the license manager consults a  
19 clock maintained by the license manager. If the current  
20 time as read from the clock is within the authorized time  
21 period, then the license manager verifies usage of the IP  
22 module. Alternatively, if the usage condition indicates  
23 use is authorized for a given number of usages, then the  
24 license manager consults a usage meter maintained by the  
25 license manager. If the usage meter indicates that the  
26 authorized number of uses has not been exceeded, then the  
27 license manager increments the usage meter and verifies  
28 usage of the IP module. Alternatively, if the usage  
29 condition indicates use is authorized on one or more  
30 particular PLDs, then the license manager reads the UDI out  
31 of the target PLD, decrypts the UDI portion of the  
32 authorization code, and verifies that the decrypted UDI



1 matches the UDI read from the PLD. If the decrypted UDI  
2 matches the UDI read from the PLD, then the license manager  
3 verifies usage of the IP module on the target PLD.

4 If the verification is made, then the license manager  
5 uses the UDI (as a public key) along with the private key  
6 to encrypt the "IP module key" from the authorization code.  
7 Once encrypted, the license manager sends the encrypted IP  
8 module key to the target PLD. The target PLD receives the  
9 encrypted IP module key and decrypts it using two keys  
10 stored on the target PLD: 1) the UDI (public key), and 2)  
11 the private key. The private key, unlike the UDI, cannot  
12 be read out of the PLD. The resulting decrypted IP module  
13 key is then stored in non-volatile memory on the PLD in  
14 association with a key number. The target PLD can use the  
15 key number to look up the key at a later time. If,  
16 however, the verification is not made, then the encrypted  
17 key is not sent to the target PLD.

18 When the user has completed the design of the user-  
19 specific circuit that incorporates the IP module, a  
20 configuration data bitstream is to be generated so that it  
21 can be sent to the target PLD to configure the target PLD.  
22 A capture/design tool in the development system outputs  
23 this configuration bitstream, but before it is sent to the  
24 target PLD, the license manager encrypts the IP module  
25 portion of the bitstream using the IP module key. The  
26 license manager also inserts into the bitstream the key  
27 number of the IP module key in such a way that the key  
28 number is associated in the bitstream with the encrypted IP  
29 module portion.

30 The target PLD receives the bitstream including the  
31 key number and the encrypted IP module portion. The target  
32 PLD uses the key number to retrieve the proper IP module

1 key from its non-volatile memory, and then uses the  
2 retrieved IP module key to decrypt the IP module portion.  
3 When the IP module portion has been decrypted, the  
4 resulting configuration data bitstream is used to configure  
5 the target PLD so as to realize the user-specific circuit.

6 Using this approach, individual IP vendors can  
7 directly license their IP modules to PLD users without  
8 involvement of the PLD manufacturer. Numerous IP modules  
9 can be used in a single user-specific design, the user  
10 having received a different authorization code for the use  
11 of each IP module. Because the IP module keys used to  
12 decrypt the IP module portions of the bitstream are  
13 themselves encrypted in a way specific to the particular  
14 target PLD (due to use of the UDI), IP vendors can license  
15 use of their IP modules for particular PLDs or for a given  
16 number of uses ("use-based licensing"). IP vendors can  
17 also license their IP modules for a time period or up until  
18 a particular expiration date ("time-based licensing").

19 Not only are IP module keys for IP modules encrypted  
20 and sent to the target PLD, but a "user key" for the  
21 portion of the user-specific design contributed by the user  
22 is also encrypted and sent to the target PLD. No  
23 authorization code is required for the encryption of the  
24 user key and the passing of this user key to the PLD. The  
25 use of this user key to decrypt the appropriate portion of  
26 the bitstream occurs as described above in connection with  
27 the IP module keys. In this way, the user-specific design  
28 of a first user is protected from copying by a second user  
29 because the portion of the user-specific circuit designed  
30 by the first user is encrypted with a user key not known to  
31 the second user. The IP modules of the IP vendors are  
32 secure from copying by a user because the IP module

1 portions of the bitstream are encrypted with IP module keys  
2 not known to the user.

3 Other structures and methods are disclosed in the  
4 detailed description below. This summary does not purport  
5 to define the invention. The invention is defined by the  
6 claims.

#### 7 8 BRIEF DESCRIPTION OF THE DRAWINGS

9 Figure 1 (Prior Art) is a block diagram illustrating  
10 conventional loading of a configuration bitstream into a  
11 programmable logic device (PLD).

12 Figure 2 is a block diagram of a system wherein a  
13 configuration bitstream is loaded into a programmable logic  
14 device (PLD) in accordance with an embodiment of the  
15 present invention.

16 Figure 3 is a simplified top-down diagram of a central  
17 part of the PLD of Figure 2 configured to involve three IP  
18 modules.

19 Figure 4 is a simplified flow-chart of a method  
20 carried out by the system 100 of Figure 2.

21 Figure 5 is a simplified diagram illustrating the  
22 intellectual property protection circuit 112 of the PLD of  
23 Figure 2.

24 Figure 6 is a simplified diagram of the configuration  
25 bitstream that configures the PLD of Figure 2.

26 Figure 7 is a flowchart of another method carried out  
27 by the system 100 of Figure 2.

#### 28 29 DETAILED DESCRIPTION

30 Figure 2 is a simplified diagram illustrating a system  
31 100 that carries out a method in accordance with an  
32 embodiment of the present invention. A configuration

1 bitstream 101 for a user-specific circuit is loaded into a  
2 target FPGA integrated circuit 102 in such a way that  
3 vendor-supplied IP module design information in the  
4 bitstream 101 is protected from unauthorized use. System  
5 100 includes authorization code generating software 103, a  
6 development system 104, an external storage device 105, and  
7 target FPGA 102. The development system 104 typically  
8 involves software executing on a personal computer or a  
9 workstation and includes a capture/design tool 106 and a  
10 license manager 107. A user 108 uses the capture/design  
11 tool 106 to design the user-specific circuit, to simulate  
12 it, to map, place and route it on FPGA 102, and to generate  
13 the configuration bitstream 101 for configuring FPGA 102.  
14 For additional information on an exemplary development  
15 system, see: pages 2-1 through 2-11 of "The Programmable  
16 Logic Data Book 1999", copyright 1999 by Xilinx, Inc. (the  
17 content of which is incorporated herein by reference).

18 FPGA 102 includes a two-dimensional array of  
19 configurable logic blocks (CLBs) 4 and a programmable  
20 interconnect structure 5 surrounded by a ring of  
21 programmable input/output blocks (IOBs) 6. An intellectual  
22 property protection circuit (IPPC) 112 is included in a  
23 corner of the FPGA 102. FPGA 102 may, for example, be a  
24 Virtex family FPGA available from Xilinx, Inc. of 2100  
25 Logic Drive, San Jose, California 95124. For additional  
26 information on a Virtex family FPGA, including information  
27 on the structure and operation of a CLB, an IOB and a  
28 programmable interconnect structure, see: pages 3-3 through  
29 3-22 of "The Programmable Logic Data Book 1999", copyright  
30 1999 by Xilinx, Inc. (the content of which is incorporated  
31 herein by reference).

1        Figure 3 is a simplified top-down diagram of the user-  
2 specific circuit as it is realized in the configured FPGA  
3 102. The square 300 of Figure 3 represents the central CLB  
4 and programmable interconnect area 4 and 5 of FPGA 102.  
5 The user-specific circuit includes three IP modules 301-  
6 303. In this example, a different piece of IP module  
7 design information is used to realize each of these modules  
8 and each piece is provided by a different IP vendor. User  
9 108 (see Fig. 2) has incorporated these IP modules 301-303  
10 into the overall user-specific circuit by providing  
11 additional circuitry 304. User 108 designs this additional  
12 circuitry 304 using capture/design tool 106. In the  
13 illustrated example, the circuitry of each of the three  
14 modules 301-303 is placed and routed in its own separate  
15 area of FPGA 102.

16        Figure 4 (comprising Figures 4A and 4B) is a flowchart  
17 of a method carried out by the system 100 of Figure 2.  
18 Generally, the user 108 seeks to incorporate an IP module  
19 (for example, IP module 301) of an IP vendor (for example,  
20 IP vendor 113) into the user's user-specific circuit. The  
21 user 108 communicates 114 with the IP vendor 113 and if a  
22 license arrangement satisfactory to IP vendor 113 is made,  
23 then IP vendor 113 supplies the user 108 with an  
24 authorization code 115 to use the IP module. The  
25 authorization code includes: 1) a usage condition, 2) an  
26 indication of the particular IP module authorized, 3) an  
27 "IP module key" for the IP module, and 4) a value (for  
28 example, a serial number or ID number or dongle number)  
29 that identifies the user's development system. There are  
30 numerous different usage conditions that can be specified.  
31 Possible usage conditions include: usage is authorized for  
32 an unlimited number of uses, usage is authorized for an

1 unlimited number of uses during a particular time period,  
2 usage is authorized for a limited number of uses, usage is  
3 authorized on particular individual PLDs.

4 In the method of Figure 4, the authorization code 115  
5 grants authorization to use one particular development  
6 system to one specified IP module on one particular target  
7 PLD only. In such a case where the authorization code  
8 grants authorization for one particular PLD, the  
9 authorization code also contains a unique device identifier  
10 (UDI) 116 of the target PLD to be programmed. Each FPGA  
11 carries its own unique UDI that is programmed into it by  
12 the FPGA manufacturer. Once a UDI is written into a FPGA  
13 at the end of FPGA manufacturing, the UDI cannot be  
14 rewritten. A UDI therefore uniquely identifies a  
15 particular FPGA.

16 Figure 5 illustrates the UDI 116 stored in a write-  
17 once, non-volatile, read-only-memory (ROM) location in  
18 intellectual property protection circuit 112. This non-  
19 volatile UDI storage can be implemented in any technology  
20 that can be added to the FPGA. The non-volatile UDI  
21 storage can, for example, be implemented using an antifuse-  
22 based register, a fuse-based register, a laser-programmed  
23 register, an EPROM register, and/or a flash-based register.

24 IP vendor 113 queries user 108 for the UDI 114 of the  
25 target FPGA 102. In one embodiment, the user 108 uses the  
26 development system 104 to read the UDI from the target FPGA  
27 102. In this embodiment, development system 104 includes  
28 associated interface hardware (not shown) and this  
29 interface hardware reads the UDI 116 out of FPGA 102. The  
30 interface hardware is provided with the development system  
31 so that the development system 104 can read from and/or  
32 write to FPGA 102. The user may, however, obtain the UDI

1 116 by means other than such interface hardware. The UDI  
2 may, for example, simply be printed on the FPGA 102.

3 When the IP vendor 113 receives UDI 116, the IP vendor  
4 113 uses authorization code software 103 to generate the  
5 authorization code 115 such that the information contained  
6 in the authorization code is encrypted using a public  
7 key/private key scheme. The public key used is UDI 116  
8 received from user 108. The private key used is a private  
9 key 117 known to the authorization code generating software  
10 103, to the license manager 107, and to PLD 102. The  
11 private key 117, unlike UDI 116, does not pass through user  
12 108 and is therefore not known to user 108. The private  
13 key 117 cannot be read out of the authorization code  
14 generating software 103, out of the development system 104,  
15 or out of PLD 102.

16 Once the authorization code 115 is generated, IP  
17 vendor 113 sends (Fig. 4, step 200) the authorization code  
18 115 to the user 108. When user 108 attempts to use IP  
19 module design information 118 (in this example, IP module  
20 design information 118 is design information for realizing  
21 IP module 301), the license manager 107 queries (step 201)  
22 user 108 for authorization code 115. User 108 responds  
23 (step 202) by supplying the authorization code 115 to the  
24 license manager 107. The license manager 107 uses the UDI  
25 116 (the public key) and the private key 117 to decrypt the  
26 authorization code 115 so as to recover: 1) the usage  
27 condition, 2) the indication of the IP module authorized,  
28 3) the "IP module key", and 4) the serial number or ID  
29 number or dongle number of the user's development system.

30 Next, license manager 107 reads (step 203) the UDI 116  
31 from the FPGA 102 and reads the serial number or ID number  
32 or dongle number of the development system 104. The

1 license manager 107 then verifies (step 204) that the  
2 authorization code 115 supplied by user 108 in fact grants  
3 access to the IP module design information 118. The  
4 license manager 107 does this by: 1) checking that the UDI  
5 116 read from FPGA 102 matches the UDI from the  
6 authorization code 115, 2) checking that the serial number  
7 or ID number or dongle number read from the user's  
8 development system 104 matches the serial number or ID  
9 number or dongle number from authorization code 115, and 3)  
10 checking that the usage condition of authorization code 115  
11 is satisfied.

12 In this embodiment, if any of these checks fails, then  
13 license manager 107 does not verify authorization to use  
14 the IP module. The license manager 107 denies the user 108  
15 access to the IP module design information 118. In one  
16 example, IP module design information 118 has been loaded  
17 into the capture/design tool 106 but is present in  
18 encrypted form. The IP module design information 118 may,  
19 for example, have been publicly available on the World Wide  
20 Web in its encrypted form and may have been downloaded by  
21 user 108 and loaded into development system 104 for  
22 intended future use. When authorization to use the IP  
23 module is not verified, the license manager 107 does not  
24 decrypt the IP module design information 118. The  
25 capture/design tool 106 is therefore unable to use the IP  
26 module design information 118 and the user 108 is unable to  
27 use the IP module design information 118 in the user-  
28 specific circuit.

29 If, on the other hand, the license manager 107  
30 succeeds in checking all these conditions, then license  
31 manager 107 verifies authorization to use the IP module and  
32 allows (step 205) user 108 access to the IP module design



1 information 118 via the capture/design tool 106. License  
2 manager 107 uses the IP module key 120 from the  
3 authorization code 115 and an encryptor/decryptor 119 to  
4 decrypt the encrypted IP module design information 118.  
5 Once decrypted, the IP module design information 118 is  
6 accessible to user 108 via capture/design tool 106. User  
7 108 can then design the IP module 301 into the user-  
8 specific circuit.

9 The IP module key 120 has a key number. In the  
10 example of Figure 2, key 120 associated with IP module  
11 design information 118 and IP module 301 is key number one.  
12 Other such keys 121-123 associated with IP modules 302-303  
13 and user's circuitry 304 are also shown in Figure 2 and are  
14 key numbers two, three and four, respectively. The keys  
15 121-122, like key 120, are keys for IP modules and  
16 therefore would have been received by license manager 107  
17 via authorization codes. Key 123, on the other hand, is a  
18 key for user's circuitry 304. Key 123 is not received via  
19 an authorization code but rather is supplied to the license  
20 manager 107 by user 108.

21 In addition to decrypting the IP module design  
22 information 118, license manager 107 retrieves (step 205)  
23 the key 120 for IP module design information 118, encrypts  
24 key 120 and its key number using the UDI 116 (as a public  
25 key) and the private key 117, and then sends to FPGA 102 a  
26 key bitstream 125 involving the encrypted key 120 and its  
27 key number. This key bitstream 125 is received in FPGA  
28 102, in one embodiment, via a JTAG boundary scan port  
29 terminal.

30 FPGA 102 uses its UDI 116 (a public key), private key  
31 117, and an encryptor/decryptor 124 to decrypt (step 206)  
32 the encrypted key and key number. The FPGA 102 then stores

1 the key 120 in association with the key number. In the  
2 illustrated example, key 120 is key number one and is  
3 written into the first location of a one-time writable ROM  
4 that holds UDI 116 and private key 117. Unlike UDI 116, IP  
5 module keys 120-123 and private key 117 are not readable  
6 from outside FPGA 102 but rather are only readable by  
7 encryptor/decryptor 124. Private key 117 is written into  
8 the FPGA by the FPGA manufacturer at the end of FPGA  
9 manufacturing. Private key 117 is not known to the IP  
10 vendor 113 nor to user 108 and never passes between FPGA  
11 102 and development system 104. The same private key 117  
12 is used by: 1) all FPGAs manufactured by a particular FPGA  
13 manufacturer, 2) the development systems used to program  
14 those FPGAs, and 3) the authorization code generating  
15 software that is used to supply authorization codes to the  
16 development systems.

17 Similar steps are carried out to obtain authorization  
18 codes and keys for the other IP modules 302 and 303 of the  
19 user-specific circuit. If IP module design information for  
20 another IP module is provided by a different IP vendor,  
21 then user 108 arranges with that IP vendor to receive a  
22 proper authorization code to access that particular IP  
23 module. Accordingly, each IP vendor can apply its own  
24 licensing restrictions on its own IP module design  
25 information. In the example of Figure 2, keys 121 and 122  
26 are the keys for IP modules 302 and 303 (Figure 3),  
27 respectively.

28 When the user 108 has completed the design of the  
29 user-specific circuit employing IP module design  
30 information for IP modules 301-303, the capture/design tool  
31 106 outputs a bitstream (step 207) for the composite user-  
32 specific circuit. Before the portion of the bitstream

1 carrying the configuration data for a particular IP module,  
2 the license manager 107 inserts a start code and then the  
3 key number of the key for that IP module. The license  
4 manager 107 uses encryptor/decryptor 119 to encrypt the  
5 associated configuration data using the key indicated by  
6 the preceding key number.

7 Figure 6 is a simplified diagram of bitstream 101.  
8 Note that the portion of the bitstream associated with IP  
9 module 301 involves a start code 305, the key number for  
10 key 120, and configuration data that is encrypted with key  
11 120. In the example of Figure 6, each of the portions of  
12 the bitstream for IP modules 301-303 is a contiguous block.  
13 This need not be the case. Note that the configuration  
14 data for the user's portion of the circuit 304 is split  
15 into three parts. Each of the parts has a start code, the  
16 key number of the user key (key 123) used to encrypt the  
17 configuration data, and a part of the configuration data.  
18 Splitting up of the configuration data in this way is  
19 facilitated by the fact that the configuration data  
20 includes address information identifying memory cells on  
21 FPGA 102 as well as data that is to be written into those  
22 identified memory cells. The bit stream 101 is sent (step  
23 208) to a serial data input (DIN) terminal of FPGA 102.

24 Next, FPGA 102 receives the bitstream 101 via the  
25 FPGA's DIN terminal and then uses encryptor/decryptor 124  
26 to decrypt (step 209) each encrypted part with its  
27 respective key. For example, when FPGA 102 receives the  
28 part of the bitstream 101 corresponding to IP module 301,  
29 it receives the start code 305 and then the key number for  
30 key 120. This key number is "one". FPGA 102 uses this key  
31 number "one" to retrieve the key 120 stored in association  
32 with key number "one" in the one-time writable non-volatile

1 ROM. Key 120 is supplied to encryptor/decryptor 124 to  
2 decrypt the following configuration data for IP module 301.  
3 In this way, the encrypted configuration data for each IP  
4 module is decrypted using the correct key identified by the  
5 preceding key number in the bitstream. The configuration  
6 data from the resulting decrypted bitstream 126 is loaded  
7 (step 209) into appropriate memory cells of the CLBs 109,  
8 IOBs 111, and configurable interconnect structure 110 so as  
9 to configure FPGA 102 to realize the user-specific circuit.  
10 Because FPGA 102 in this example is a Virtex family Xilinx  
11 FPGA, the resulting decrypted bitstream 126 comports with  
12 the standard Xilinx bitstream protocol for configuring a  
13 Virtex family FPGA. If, on the other hand, the PLD being  
14 configured is not a Xilinx Virtex FPGA and therefore  
15 requires a different configuration bitstream, then  
16 decrypted bitstream 126 would comport with the protocol  
17 required by that PLD.

18 Various encryption methods and structures are known  
19 and available for use in implementing system 100. In one  
20 embodiment, encryptor/decryptor 119 and encryptor/decryptor  
21 124 are DES (Data Encryption Standard)  
22 encryptor/decryptors. Encryptor/decryptor 119 is, for  
23 example, realized in software whereas encryptor/decryptor  
24 124 is realized in hardware. The DES algorithm has been a  
25 nationwide standard since about 1976. For additional  
26 information and implementation considerations involved in  
27 realizing DES encryptors and decryptors in software and  
28 hardware, see: 1) Applied Cryptography, second edition, by  
29 Bruce Schneier, Chapter 12: Data Encryption Standard (DES),  
30 pages 265-301 (1996); 2) U.S. Patent Numbers 5,671,284 and  
31 5,835,599 to Buer; and 3) U.S. Patent Number 4,731,843 to

1 Holmquist (the content of these documents is incorporated  
2 herein by reference).

3 It is desired that one user not be able to understand  
4 or copy the design of another user by copying the bitstream  
5 loaded into the FPGA on power-up. In the above-described  
6 embodiment, the user provides key "KEY 4" 123 and this key  
7 is used to encrypt the portions of the bitstream associated  
8 with user's portion 304 of the user-specific circuit. A  
9 second user cannot therefore decipher the first user's  
10 design by examining the bitstream. The second user cannot  
11 copy the bitstream and program other FPGAs, even if the  
12 second user were to arrange with the necessary IP vendors  
13 to use the needed IP modules, because the second user would  
14 not know "KEY 4" of the first user. Because each FPGA  
15 programmed must first be loaded with the set of keys 119  
16 from the license manager, and because the bitstream by  
17 which these keys is loaded is not the same from FPGA to  
18 FPGA, copying the bitstream by which the keys are loaded  
19 into one FPGA would not enable the second user to load the  
20 keys into another FPGA.

21 It is also desired that a user not be able to  
22 understand or copy the IP module design from an IP vendor.  
23 In the above-described embodiment, the portion of the  
24 configuration bitstream 101 corresponding to an IP module  
25 is encrypted with a key that is never known by the user.  
26 The user cannot therefore decrypt the IP module. The user  
27 cannot steal the key by monitoring the transfer of keys to  
28 the FPGA because the keys are encrypted using the UDI (a  
29 public key) and a private key not known to the user.

30 It is also desired that the configuration bitstream  
31 101 itself (as opposed to the bitstream 125 by which the  
32 keys are loaded) be identical for all FPGAs of a given

1 user-specific design. This facilitates rapid programming  
2 of the user-specific circuit design into multiple FPGAs at  
3 the same time. In the above-described embodiment,  
4 bitstream 101 is the same for all FPGAs programmed with the  
5 same user-specific circuit. Key bitstream 125 by which the  
6 keys are loaded changes from FPGA to FPGA, but the  
7 configuration data bitstream 101 remains the same.

8 Care is also taken to ensure that a user cannot  
9 arrange with an IP vendor to use an IP module for a limited  
10 time or a limited number of usages, gain access to the IP  
11 module in an authorized manner for example via  
12 capture/design tool 106, but then examine the internal  
13 design of the IP module via the capture/design tool, copy  
14 the design, and use the copied design again outside the  
15 control of the IP vendor.

16 In the capture/design tool 106, a representation of  
17 the user-specific circuit complete with the IP modules 301-  
18 303 exists in a netlist form. Ordinarily a user has been  
19 able to view a net in any portion of the user-specific  
20 circuit. The user could, for example, select a net and  
21 then view in graphical form all circuit elements to which  
22 it is connected. Doing this for all nets in a circuit  
23 reveals the circuit. The user could ordinarily view any  
24 net in the user-specific circuit at the logic netlist  
25 stage, or after place and route and the logic-optimized  
26 netlist stage. In accordance with one embodiment of the  
27 present invention, each net of the user-specific circuit  
28 carries a "visible/invisible" attribute. All nets inside  
29 an IP module carry the "invisible" attribute. If the user  
30 were to attempt to use the capture/design tool to view a  
31 net inside an IP module in an attempt to redraw the  
32 circuitry, the capture/design tool 106 would detect the

1 "invisible" attribute of the net and not allow the user to  
2 examine the net. Nets outside the IP modules, on the other  
3 hand, carry the "visible" attribute and are visible to the  
4 user via the capture/design tool 106. The "invisible"  
5 attribute on a net would also prevent the user from viewing  
6 signals on the net during simulation.

7 Because the keys are written into each respective FPGA  
8 using a unique UDI that is first read from the particular  
9 FPGA being programmed, the license manager 107 is able to  
10 control which particular FPGAs are programmed. This, in  
11 combination with an authorization code that is specific to  
12 a particular target FPGA, allows an individual IP vendor to  
13 employ "use-based" licensing of an IP module.

14 An IP vendor may also employ "time-based" licensing of  
15 an IP module. In one embodiment, IP vendor 113 gives user  
16 108 an authorization code 115 to use an IP module for a  
17 certain period of time or up until a certain expiration  
18 date. IP vendor 113 loads the time period or expiration  
19 date into license manager 107. Once the licensing manager  
20 determines (for example, using a clock internal to the  
21 license manager) that the authorized time period has  
22 expired or the expiration data has passed, the licensing  
23 manager 107 no longer verifies that authorization 115  
24 authorizes usage of the IP module.

25 It is therefore seen that a single FPGA can involve  
26 multiple IP modules, where each IP module is licensed by a  
27 different IP vendor using a different license and business  
28 arrangement without the intervention of the FPGA  
29 manufacturer. The direct interaction between IP vendors  
30 and users is generally advantageous from the FPGA  
31 manufacturer's point of view, because it eliminates the  
32 need for the FPGA manufacturer to act as a royalty

1 collector on behalf of IP vendors. Moreover, the ability  
2 of an end user to program FPGAs with selected IP modules  
3 without being able to steal the IP module design eliminates  
4 the need for the FPGA manufacturer or the IP vendor to  
5 inventory FPGAs partially programmed with individual IP  
6 modules.

7 In the example of Figure 4 the user cannot design an  
8 IP module into the user-specific design before a suitable  
9 license arrangement has been made because authorization  
10 code 115 is required in order for the capture/design tool  
11 106 to access the IP module design information 118. This  
12 need not, however, be the case. In one embodiment, the  
13 capture/design tool 106 decrypts the IP module design  
14 information 118 and allows the user access to the IP module  
15 design information 118 thereby allowing the user to design  
16 the IP module into a user-specific design without any  
17 authorization code. The user cannot view nets within the  
18 IP module or view simulation signals inside the IP module.  
19 The IP module therefore appears as a black box and is  
20 fairly secure from being reverse-engineered by the user.  
21 Only at the point that the user-specific design is ready  
22 for downloading to FPGA 102 as bitstream 101 does the user  
23 have to obtain the appropriate IP module licenses. When  
24 the user attempts to create configuration bitstream 101,  
25 the license manager reads the UDI 116 from FPGA 102 and  
26 asks the user for authorization code 115. If, as in the  
27 method of Figure 4, the user provides an appropriate  
28 authorization code (that, among other things, contains the  
29 UDI 116 read from target FPGA 102), then the license  
30 manager 107 sends key bitstream 125 to the target FPGA 102  
31 and allows the encrypted configuration bitstream 101 to be  
32 generated.



Figure 7 is a flowchart of another method carried out by system 100 of Figure 2. In this method, a different configuration bitstream is generated for each different PLD to be configured even if the same user-specific circuit is being programmed into each PLD. Steps 400-404 of the method of Figure 7 are the same as steps 200-204 of the method of Figure 4. In step 405, the license manager 107 allows access to the IP module, but does not encrypt a key and key number and does not send them to the PLD 102 being programmed. PLD 102 therefore does not decrypt keys and key numbers, nor does PLD 102 store any such decrypted keys. When the user has designed the user-specific circuit employing the IP module, a configuration bitstream is output (Step 407) by capture/design tool 106. No key numbers are inserted into the bitstream as in step 207 of Figure 4, rather the entire configuration bitstream is encrypted using a UDI-dependent key and private key 117. The UDI-dependent key is, on one embodiment, UDI 116 as read from PLD 102. UDI 116 is, however, also stored on PLD 102. PLD 102 uses the UDI-dependent key along with private key 117 to decrypt (Step 408) the incoming encrypted configuration bitstream 101 and then configures PLD 102 using the resulting bitstream so as to realize the user-specific circuit. Because the incoming encrypted configuration bitstream 101 is encrypted using a key that depends on the UDI 116 of the particular target PLD 102, target PLD 102 is the only PLD that can decrypt and use this configuration bitstream.

FPGA 102 implements a read-back mechanism usable to read out the bitstream and/or to examine internal states of the FPGA. In one embodiment, a read back bitstream passes out of FPGA 102 via encryptor/decryptor 124 (see Figure 5).

1 A readback key known to license manager 107 (for example, a  
2 UDI-dependent key that is derived in a particular way from  
3 UDI 116) is used to encrypt the read-back bitstream. This  
4 readback key may be, for example, generated from UDI 116  
5 via hardware and as such is not stored in non-volatile  
6 memory on FPGA 102.

7 The license manager 107, having previously read UDI  
8 116, also knows how the readback key is generated from UDI  
9 116. The license manager 107 is therefore able to obtain  
10 the readback key and to use the readback key along with  
11 encryptor-decryptor 119 to decrypt the read-back bitstream.  
12 License manager 107 controls capture/design tool 106 so  
13 that the user can only examine those portions of the  
14 readback data and states that do not reveal the inner  
15 workings of secure IP modules. This gives the user access  
16 to information about the portions of the user-specific  
17 design that the user controls, while protecting the secure  
18 IP modules from reverse-engineering attempts.

19 A commercially-available general purpose license  
20 management system involving a license manager and  
21 authorization code generating software may be adapted to  
22 serve as license manager 107 and authorization code  
23 generating software 103. For example, the Flexible License  
24 Manager (FLEXlm) (also called the "Highland License  
25 Manager") available from GLOBEtrotter Software, Inc. of  
26 Cupertino, California may be employed. The UDI,  
27 development system serial number, and/or other information  
28 in the authorization code is not, in some embodiments,  
29 encrypted. Rather, it is present in the authorization code  
30 in unencrypted form but is combined with a specially  
31 generated Message Authentication Code (MAC). The MAC is a  
32 complex checksum produced from the rest of the

1 authorization code in a way not known to the user. Because  
2 the user is not aware of how the checksum was produced, the  
3 user is unable to generate his/her own valid authorization  
4 codes.

5 Although the present invention is described in  
6 connection with certain specific embodiments for  
7 instructional purposes, the present invention is not  
8 limited thereto. The disclosed embodiments are applicable  
9 to one-time programmable PLDs and FPGAs (including  
10 antifuse- or oxide-rupture-based, fuse-based, and laser-  
11 programmed PLDs and FPGAs), to non-volatile PLDs and FPGAs  
12 (including EPROM-based and flash-based PLDs and FPGAs), as  
13 well as to RAM-based PLDs and FPGAs. The license manager  
14 may read the UDI from the PLD to be programmed and then  
15 receive the authorization code from the user, or  
16 alternatively may read the UDI from the PLD to be  
17 programmed after receiving the authorization code from the  
18 user. In some embodiments, a user can use the  
19 capture/design tools to design an IP module into the user-  
20 specific circuit without having supplied a suitable  
21 authorization code, the license manager only requiring a  
22 proper authorization code if a final output configuration  
23 bitstream is to be generated. IP module keys can be  
24 transferred from the license manager to the target PLD  
25 without the use of a public key/private key encryption  
26 scheme. Other ways of protecting the IP module keys from  
27 unauthorized use can be used. In one embodiment, the IP  
28 module keys are encrypted just with the UDI and then are  
29 transferred to the target PLD. The authorization code need  
30 not contain a serial number or ID number or dongle number  
31 identifying the user's development system. In some  
32 embodiments, an authorization code grants access to an IP

1 module on any development system, provided that the usage  
2 conditions indicated by the authorization code are met.  
3 Accordingly, various modifications, adaptations, and  
4 combinations of various features of the described  
5 embodiments can be practiced without departing from the  
6 scope of the invention as set forth in the claims.

1 CLAIMS:

2 What is claimed is:

3

4 1. A method, comprising:

5 (a) maintaining a device identifier and a private key  
6 in a programmable logic device, the device identifier and  
7 the private key being non-volatile such that if power to  
8 the programmable logic device is lost the device  
9 identifier and private key remain stored in the  
10 programmable logic device;

11 (b) receiving a first encrypted key onto the  
12 programmable logic device, and using the device  
13 identifier and the private key to decrypt the first  
14 encrypted key thereby generating a first key;

15 (c) receiving onto the programmable logic device a  
16 bitstream comprising first encrypted configuration data  
17 encrypted with the first key;

18 (d) using the first key to decrypt the first encrypted  
19 configuration data on the programmable logic device  
20 thereby generating first configuration data; and

21 (e) configuring a first portion of the programmable  
22 logic device using the first configuration data.

23

24 2. The method of Claim 1, wherein neither the device  
25 identifier nor the private key are rewritable.

26

27 3. The method of Claim 1, wherein the bitstream further  
28 comprises a first key number associated with the first  
29 encrypted configuration data, the first key being stored  
30 on the programmable logic device in association with the  
31 first key number, the programmable logic device in step  
32 (d) using the first key number in the bitstream to

1 identify the first key as the key that will be used in  
2 step (d) to decrypt the first encrypted configuration  
3 data.

4

5 4. The method of Claim 1, wherein the device identifier  
6 and the private key are stored on the programmable logic  
7 device in one of the group consisting of: an antifuse-  
8 based storage element, a fuse-based storage element, a  
9 laser-programmed storage element, an EPROM storage  
10 element, and a flash-based storage element.

11

12 5. The method of Claim 1, further comprising:  
13 after the first key is generated in step (b), storing  
14 the first key in non-volatile memory on the programmable  
15 logic device.

16

17 6. The method of Claim 1, wherein the first encrypted  
18 configuration data is decrypted in step (d) on the  
19 programmable logic device by a hardware decryptor.

20

21 7. The method of Claim 1 wherein  
22 step (b) further comprises receiving a second encrypted  
23 key onto the programmable logic device and using the  
24 device identifier and the private key to decrypt the  
25 second encrypted key, thereby generating a second key;  
26 step (c) further comprises receiving onto the  
27 programmable logic device a bitstream comprising second  
28 encrypted configuration data encrypted with the second  
29 key;  
30 step (d) further comprises using the second key to  
31 decrypt the second encrypted configuration data on the

1     programmable logic device, thereby generating second  
2     configuration data; and  
3     step (e) further comprises configuring a second  
4     portion of the programmable logic device using the second  
5     configuration data.

6  
7     8.    The method of Claim 7, wherein the bitstream further  
8     comprises a first key number associated with the first  
9     encrypted configuration data, and wherein the bitstream  
10    further comprises a second key number associated with the  
11    second encrypted configuration data, the first key being  
12    stored on the programmable logic device in association  
13    with the first key number, the second key being stored on  
14    the programmable logic device in association with the  
15    second key number, the programmable logic device in (d)  
16    using the first key number in the bitstream to identify  
17    the first key as the key that will be used in (d) to  
18    decrypt the first encrypted configuration data, the  
19    programmable logic device in (d) using the second key  
20    number in the bitstream to identify the second key as the  
21    key that will be used in (d) to decrypt the second  
22    configuration data.

23  
24    9.    The method of Claim 7 further comprising:  
25    after the first key and the second key are generated in  
26    step (b), storing the first key and the second key in  
27    non-volatile memory on the programmable logic device.

28  
29    10.   The method of Claim 7, wherein the first portion of  
30    the programmable logic device is configured in (e) to  
31    realize a first IP module, and wherein the second portion

1 of the programmable logic device is configured in (e) to  
2 realize a second IP module.

3  
4 11. The method of Claim 1, wherein the programmable logic  
5 device is an SRAM-based PLD.

6  
7 12. The method of Claim 10, wherein the non-volatile  
8 memory in the programmable logic device is flash-based.

9  
10 13. The method of Claim 10, wherein the non-volatile  
11 memory in the programmable logic device is one-time  
12 programmable.

13  
14 14. The method of Claim 10, wherein the non-volatile  
15 memory in the programmable logic device is antifuse-  
16 based.

17  
18 15. The method of Claim 10, wherein the non-volatile  
19 memory in the programmable logic device is fuse-based.

20  
21 16. The method of Claim 1, wherein the device identifier  
22 and the private key are rewritable at one time, but as of  
23 the time step (a) occurs are no longer rewritable.

24  
25 17. The method of Claim 1, further comprising:  
26 receiving on a license manager the device identifier  
27 maintained on the programmable logic device;  
28 receiving on the license manager a first authorization  
29 code; and  
30 determining whether the first authorization code has a  
31 predetermined relationship with respect to the device  
32 identifier, wherein if the first authorization code is



1 determined to have the predetermined relationship then  
2 the license manager sends the first encrypted key to the  
3 programmable logic device such that it is received in  
4 step (b), and wherein if the first authorization code is  
5 determined not to have the predetermined relationship  
6 then the license manager does not send the first  
7 encrypted key to the programmable logic device in step  
8 (b)

9  
10 18. The method of Claim 17, wherein the first  
11 authorization code has the predetermined relationship  
12 with respect to the device identifier if the first  
13 authorization code contains the device identifier in an  
14 encrypted form.

15  
16 19. A method comprising:  
17 receiving onto a programmable logic device an  
18 encrypted first key;  
19 on the programmable logic device decrypting the  
20 encrypted first key to generate a first key and storing  
21 the first key on the programmable logic device;  
22 receiving onto the programmable logic device a  
23 configuration bitstream having a first portion and a  
24 second portion;  
25 on the programmable logic device decrypting the first  
26 portion of the configuration bitstream using the first  
27 key;  
28 configuring the programmable logic device with the  
29 decrypted first portion of the configuration bitstream  
30 thereby realizing a first IP module;.  
31

1 20. A programmable logic device that receives an encrypted  
2 configuration bitstream, the programmable logic device  
3 comprising:

4 non-volatile storage that stores a first key;  
5 a decryptor that decrypts a first part of the  
6 encrypted configuration bitstream using the first key and  
7 thereby generates first configuration data; and  
8 first configurable logic elements being configured by  
9 the first configuration data.

10  
11 21. The programmable logic device of Claim 20, wherein the  
12 first part of the encrypted configuration bitstream is  
13 identified by a first key number in the bitstream, the  
14 first key number identifying the first key in the non-  
15 volatile storage.

16  
17 22. A method, comprising:

18 receiving on a development system a device identifier  
19 from a programmable logic device;

20 receiving on the development system an authorization  
21 code;

22 verifying on the development system that the  
23 authorization code and the device identifier have a  
24 predetermined relationship, wherein if the authorization  
25 code and the device identifier have the predetermined  
26 relationship then encrypting a key using the device  
27 identifier and sending the encrypted key from the  
28 development system to the programmable logic device, but  
29 wherein if the authorization code and the device  
30 identifier do not have the predetermined relationship  
31 then the encrypted key is not sent from the development  
32 system to the programmable logic device; and

1       the development system using the key to encrypt a  
2       portion of a configuration data bitstream, the  
3       development system outputting the configuration data  
4       bitstream including the encrypted portion.

5  
6   23.   The method of Claim 22, wherein the key has a key  
7       number, and wherein the development system adds the key  
8       number to the configuration data bitstream such that the  
9       key number is associated with the encrypted portion of  
10      the configuration data bitstream, the configuration data  
11      bitstream output from the development system including  
12      the encrypted portion and the key number.

13  
14   24.   The method of Claim 22, wherein the development system  
15      comprises a capture/design tool and a license manager,  
16      the method further comprising:

17       if the authorization code and the device identifier  
18       are verified as having the predetermined relationship  
19       then the license manager allows use of IP module design  
20       information by the capture/design tool, whereas if the  
21       authorization code and the device identifier are not  
22       verified as having the predetermined relationship then  
23       the license manager does not allow use of the IP module  
24       design information by the capture/design tool.

25  
26   25.   The method of Claim 22, wherein the portion of the  
27      configuration data bitstream is configuration data for an  
28      IP module, the development system comprising a  
29      capture/design tool, the capture/design tool being usable  
30      to view a net external to the IP module, the  
31      capture/design tool not being usable to view a net  
32      internal to the IP module.

1  
2 26. A development system, comprising:

3 a capture/design tool; and  
4 means for verifying that an authorization code has a  
5 predetermined relationship with respect to a device  
6 identifier read from a programmable logic device, and if  
7 the authorization code is verified then the means also  
8 encrypting a key and sending the encrypted key to the  
9 programmable logic device, if the authorization code is  
10 verified then the means also uses the key to encrypt a  
11 portion of a configuration data bitstream output by the  
12 capture/design tool, the configuration data bitstream  
13 including the encrypted portion being sent to the  
14 programmable logic device.

15  
16 27. The development system of Claim 26, wherein the  
17 encrypted portion of the bitstream contains configuration  
18 data for an IP module, the capture/design tool being  
19 usable to view a net external to the IP module, the  
20 capture/design tool being unusable to view a net internal  
21 to the IP module.

22  
23 28. The development system of Claim 26, wherein the key  
24 has a key number, the means inserting the key number into  
25 the configuration data bitstream sent to the programmable  
26 logic device, the key number in the configuration data  
27 bitstream being associated with the encrypted portion of  
28 the configuration data bitstream.



INTELLECTUAL PROPERTY PROTECTION  
IN A PROGRAMMABLE LOGIC DEVICE

David B. Parlour

Richard S. Ballantyne

ABSTRACT OF THE DISCLOSURE

Individual IP vendors can directly license their IP modules to PLD users under their own chosen conditions. Individual IP vendors can use time-based licenses or use-based licenses. Each PLD is manufactured with a non-volatile non-rewritable unique device identifier (UDI) that uniquely identifies the PLD. If, for example, a user obtains a license to use a particular IP module on a particular PLD, then the IP vendor issues the user an authorization code that contains the UDI (in encrypted form) of the authorized target PLD. When the user wishes to use the IP module, the user supplies the authorization code to a license manager. The license manager decrypts the authorization code and checks that the UDI of the supplied authorization code matches the UDI of the to-be-programmed target PLD. If the two match, then the license manager encrypts a key for the IP module using the UDI and a private key, and then sends the encrypted key to the target PLD. The target PLD uses its UDI and the private key to decrypt the key. The key is then stored on the PLD. When the configuration bitstream for the design that incorporates the IP module is later sent to the PLD, the license manager encrypts the IP module portion with the key. The PLD receives the bitstream and uses the stored key to decrypt the IP module portion of the bitstream. The unencrypted bitstream is then used to configure the PLD.

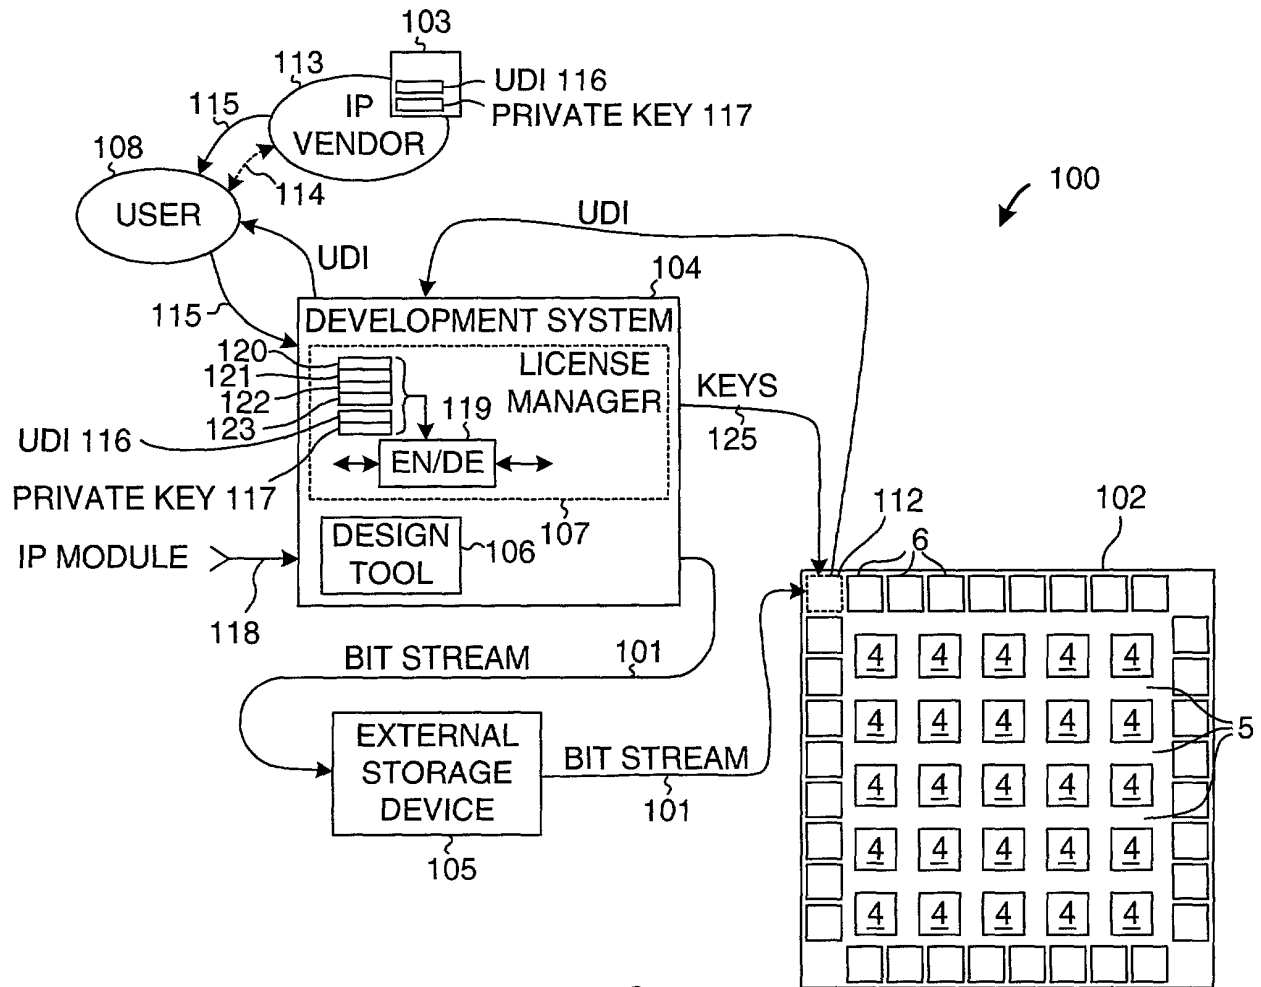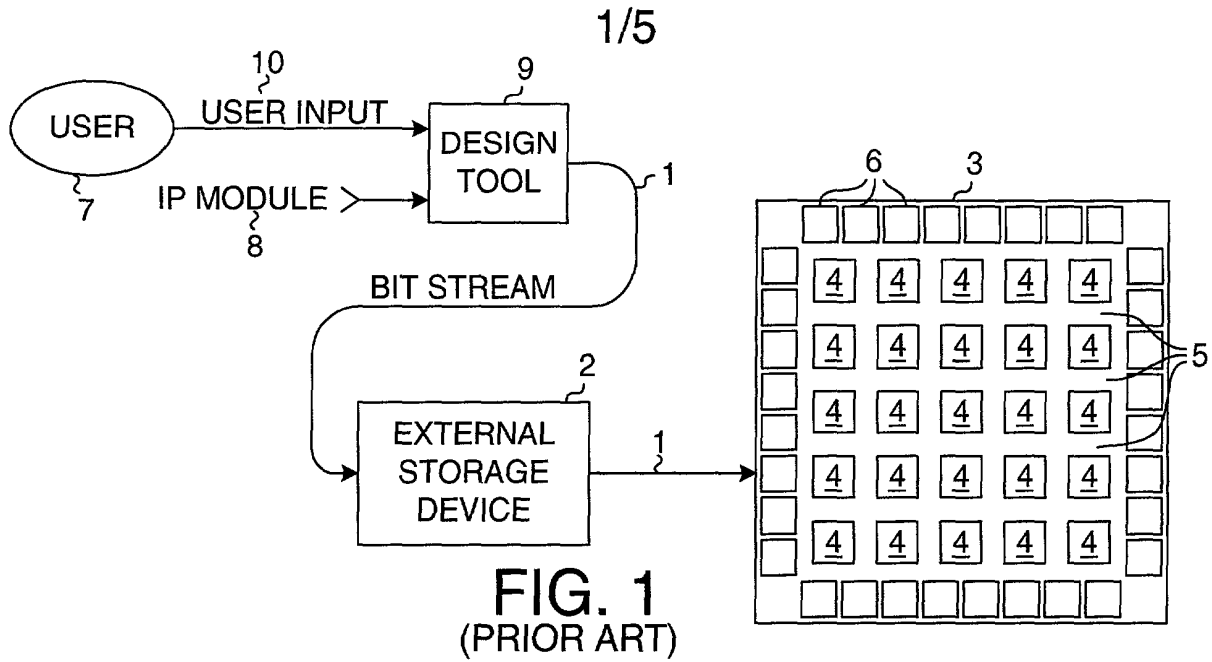

2/5

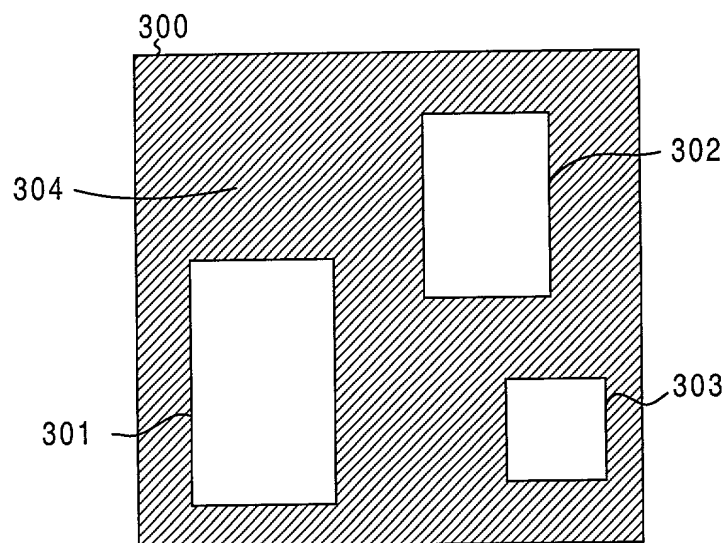


FIG. 3

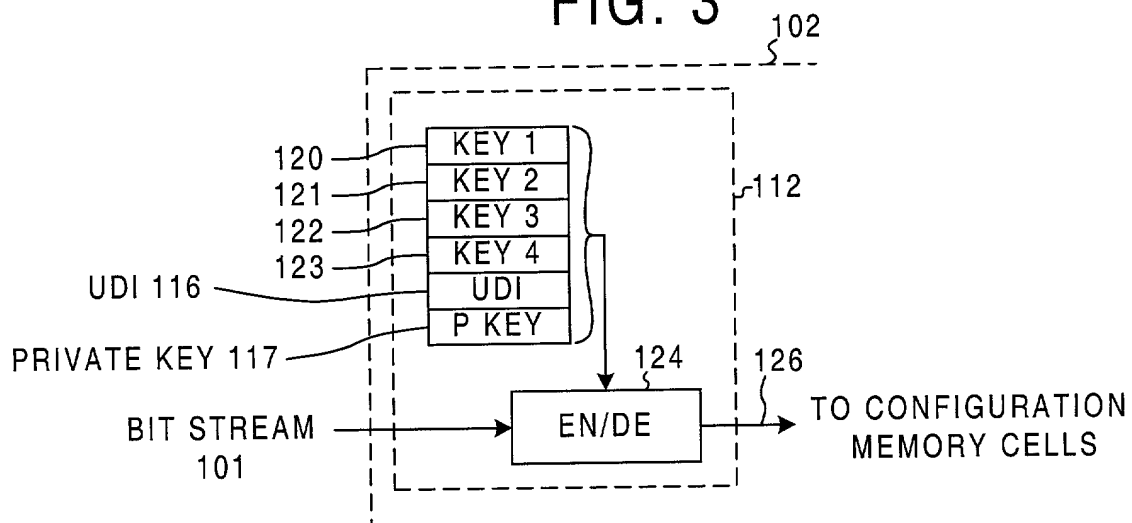


FIG. 5

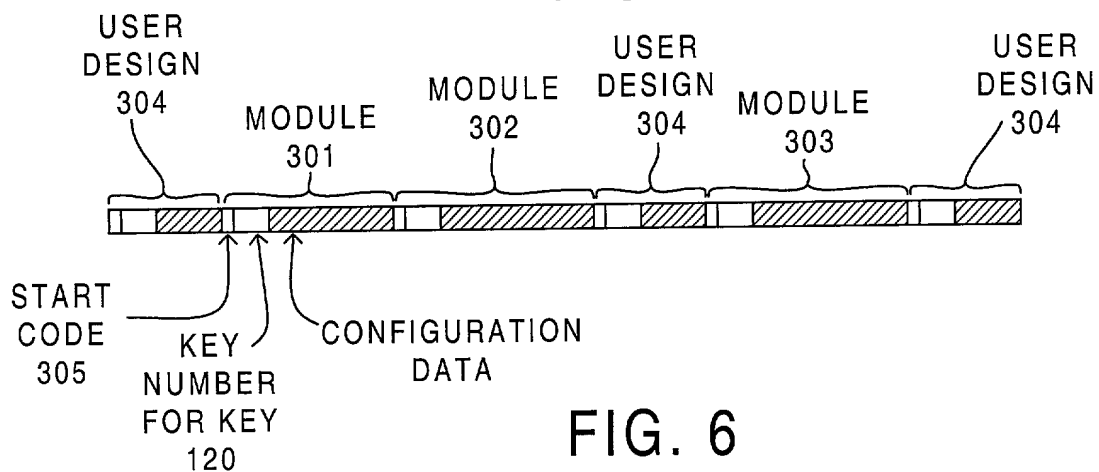


FIG. 6

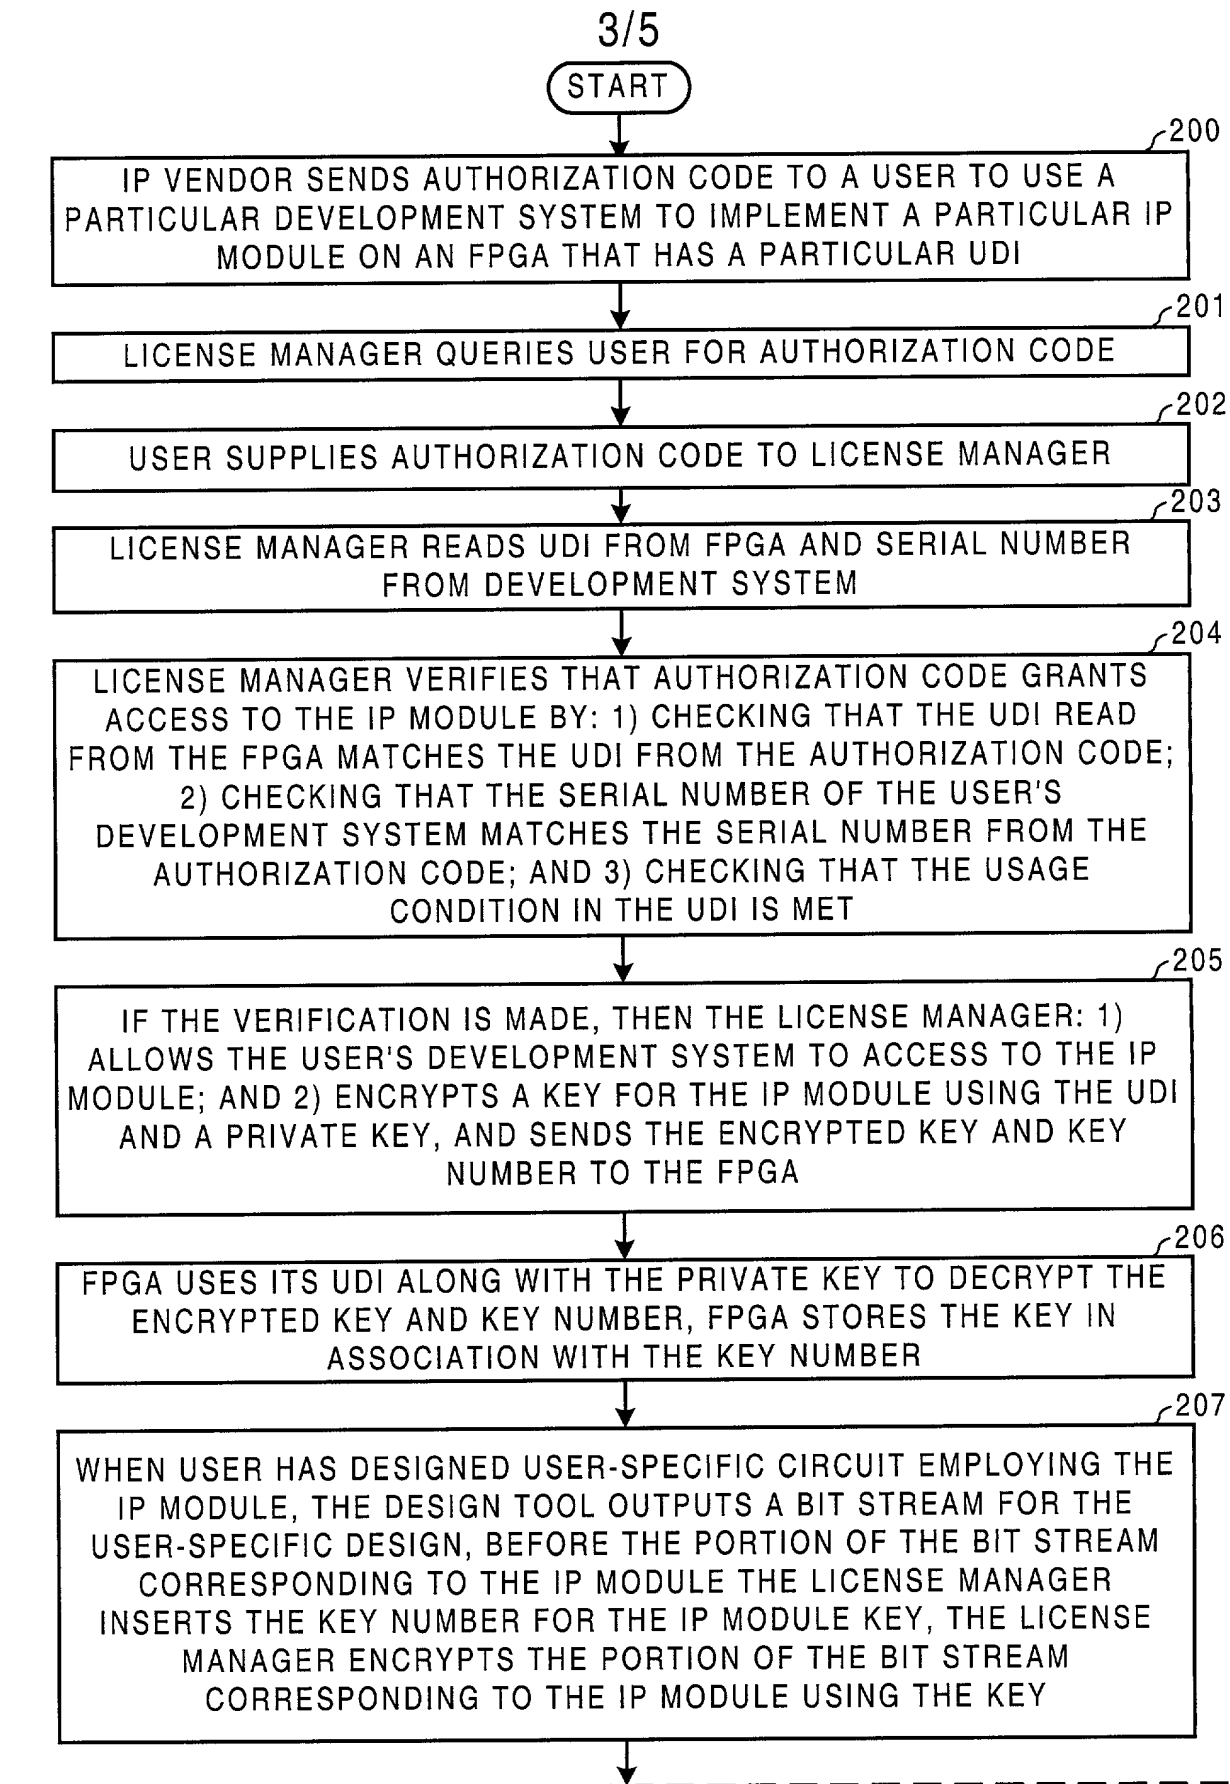


FIG. 4A



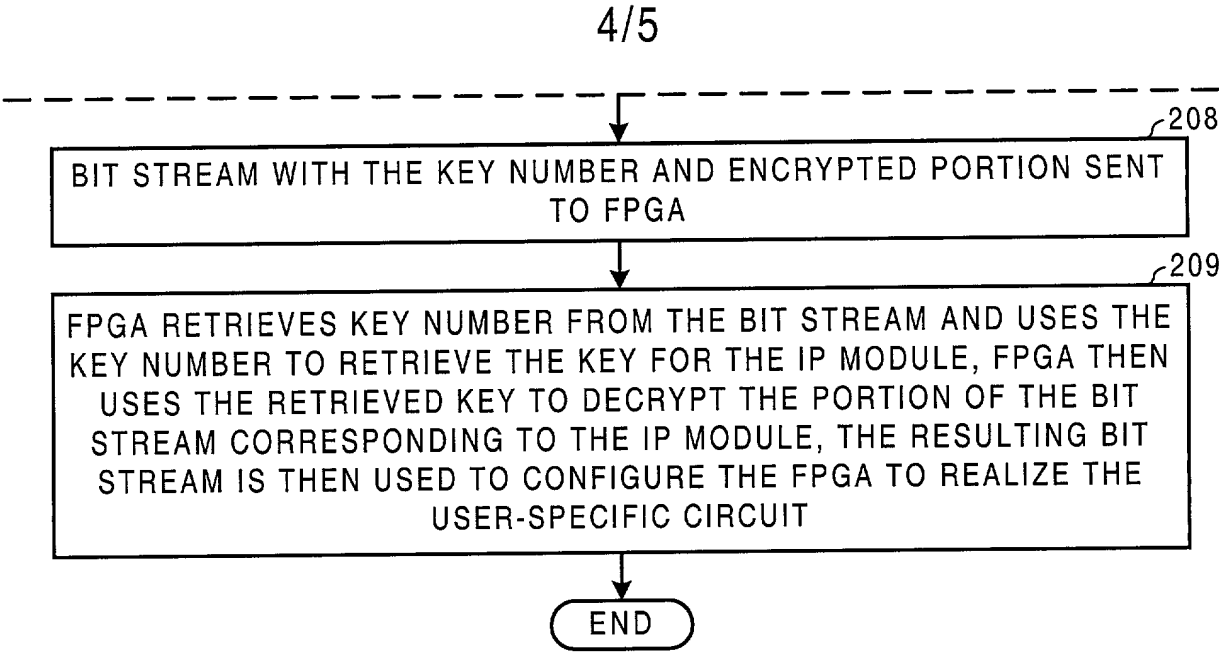


FIG. 4B

KEY TO FIG. 4




FIG. 4B

FIG. 4

5/5

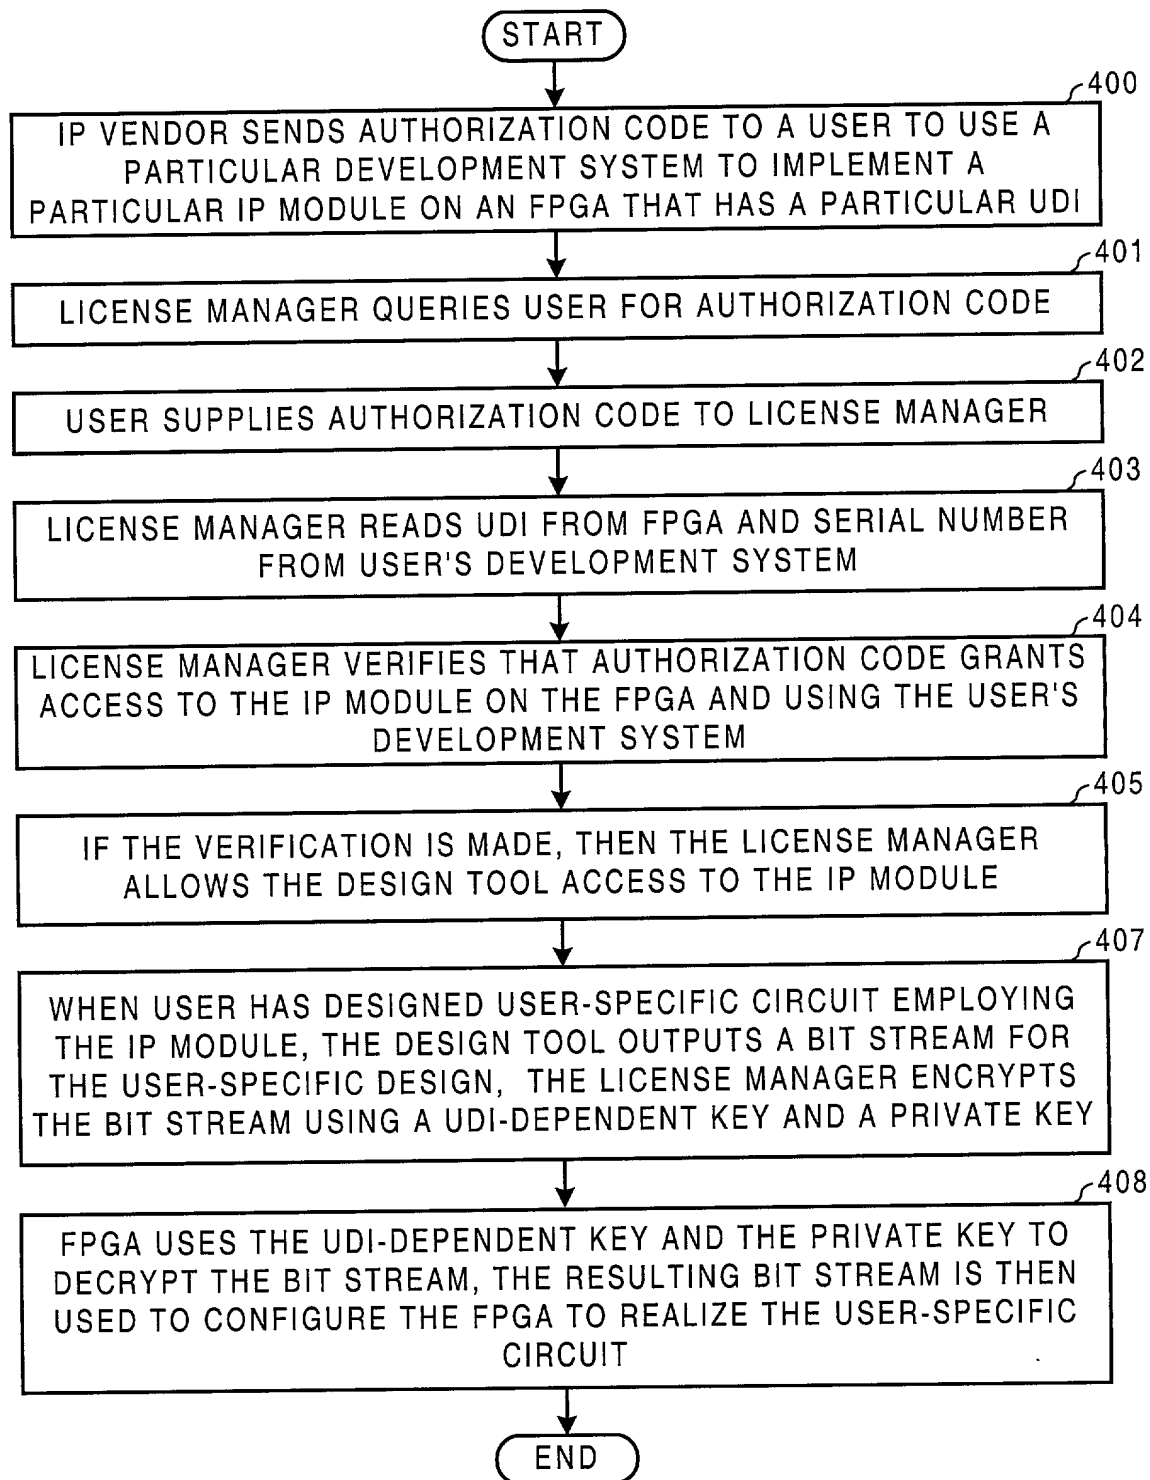


FIG. 7

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) that is disclosed and/or claimed and for which a patent is solicited by way of the application entitled

## INTELLECTUAL PROPERTY PROTECTION IN A PROGRAMMABLE LOGIC DEVICE

which (check)

- ☒ is attached hereto.  
☐ and is amended by the Preliminary Amendment attached hereto.  
☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_.  
☐ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, including portions amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
			Yes	No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)		
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below

(Application Number(s))	(Filing Date (MM/DD/YYYY))
_____	_____

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as any subject matter of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected herewith:

Edel M. Young (32,451), and Lois D. Cartier (40,941) located at Xilinx, Inc., 2100 Logic Drive, San Jose, California 95124, and

Arthur J. Behiel (39,603) located at the Law Office of Arthur Joseph Behiel, 7041 Koll Center Parkway, Suite 280, Pleasanton, California 94566.

Address all telephone calls to: Edel M. Young at Telephone No. (408) 879- 4969

Address all correspondence to: Edel M. Young  
Xilinx, Inc.  
2100 Logic Drive  
San Jose, California 95124

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Full name of sole or first inventor David B. Parlour

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence 4231 Parkman Avenue, Pittsburg, PA 15213 Citizenship Canada

Post Office Address 4231 Parkman Avenue, Pittsburg, PA 15213

Full name second inventor Richard S. Ballantyne

Inventor's signature  Date March 3/2011

Residence 34 Hampel Crescent, Stittsville, Ontario K2S1E4 Citizenship Canada

Post Office Address 34 Hampel Crescent, Stittsville, Ontario K2S1E4 Canada

Full name third inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name fourth inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) that is disclosed and/or claimed and for which a patent is solicited by way of the application entitled

## INTELLECTUAL PROPERTY PROTECTION IN A PROGRAMMABLE LOGIC DEVICE

which (check)

- ☒ is attached hereto.  
☐ and is amended by the Preliminary Amendment attached hereto.  
☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_.  
☐ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, including portions amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
			Yes	No
_____	_____	_____		
(Number)	(Country)	(Day/Month/Year Filed)		
_____	_____	_____		
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below

_____	_____
(Application Number(s))	(Filing Date (MM/DD/YYYY))

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as any subject matter of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected herewith:

Edel M. Young (32,451), and Lois D. Cartier (40,941) located at Xilinx, Inc., 2100 Logic Drive, San Jose, California 95124, and

Arthur J. Behiel (39,603) located at the Law Office of Arthur Joseph Behiel, 7041 Koll Center Parkway, Suite 280, Pleasanton, California 94566.

Address all telephone calls to: Edel M. Young at Telephone No. (408) 879- 4969

Address all correspondence to: Edel M. Young  
Xilinx, Inc.  
2100 Logic Drive  
San Jose, California 95124

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor David B. Parlour

Inventor's signature David B. Parlour Date 10th March, 2000

Residence 4231 Parkman Avenue, Pittsburg, PA 15213 Citizenship Canada

Post Office Address 4231 Parkman Avenue, Pittsburg, PA 15213

Full name second inventor Richard S. Ballantyne

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence 34 Hampel Crescent, Stittsville, Ontario K2S1E4 Citizenship Canada

Post Office Address 34 Hampel Crescent, Stittsville, Ontario K2S1E4 Canada

Full name third inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name fourth inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_